

**TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371****R.36041**

U.S. APPLICATION NO. (IF KNOWN, SEE 37 CFR

10/088998

INTERNATIONAL APPLICATION NO.

PCT/DE 00/03405

INTERNATIONAL FILING DATE

29 September 2000

PRIORITY DATE CLAIMED

30 September 1999

TITLE OF INVENTION

Apparatus For Aftertreating Exhaust Gases Of An Internal Combustion Engine

APPLICANT(S) FOR DO/EO/US

**Frisch, Walter Huber, Sven Krah, Juergen Mayer, Hanspeter Offenhuber, Michael
Sachsenhofer, Robert Weiss, Roland Foetschl, Markus Schwarz, Roland Hoepflinger, Gerald**

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (24) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31).
5. ☒ A copy of the International Application as filed (35 U.S.C. 371 (c) (2))
 - a. ☒ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ has been communicated by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☒ An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).
 - a. ☒ is attached hereto.
 - b. ☐ has been previously submitted under 35 U.S.C. 154(d)(4).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371 (c)(3))
 - a. ☒ are attached hereto (required only if not communicated by the International Bureau).
 - b. ☐ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☒ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).
10. ☒ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).
11. ☒ A copy of the International Preliminary Examination Report (PCT/IPEA/409).
12. ☒ A copy of the International Search Report (PCT/ISA/210).

Items 13 to 20 below concern document(s) or information included:

13. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
14. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
15. ☒ A **FIRST** preliminary amendment.
16. ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
17. ☐ A substitute specification.
18. ☐ A change of power of attorney and/or address letter.
19. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.
20. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
21. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
22. ☐ Certificate of Mailing by Express Mail
23. ☒ Other items or information:

Transmittal Sheets in duplicate w/fees charged to Dep.Acct. 07-2100; Copy of German Text Appl.w/3 sheets drawings; German Text Amended Pages; Translation of German Text Appl and Amended Pages w/3 sheets drawings; Preliminary Amendment; Copy of PCT/RO/101; PCT/ISA/210/220; PCT/IPEA/401/409/416; Executed Declaration (not enclosed) Assignment to Robert Bosch GmbH (not enclosed).

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Walter Frisch et al

Based on PCT/DE 00/03405

For: Apparatus for Aftertreating Exhaust Gases of an Internal Combustion Engine

PRELIMINARY AMENDMENT

Commissioner for Patents and Trademarks
Washington, D.C. 20231

Sir:

Prior to examination, please amend the above-identified application as follows:

IN THE SPECIFICATION

Page 1, between the title and paragraph [0001], insert the following:

[0000.2] CROSS-REFERENCE TO RELATED APPLICATIONS

[0000.4] This application is a 35 USC 371 application of PCT/DE 00/03405 filed
on September 29, 2000.

[0000.6] BACKGROUND OF THE INVENTION

replace paragraph [0001] with the following amended paragraph:

[0001] Field of the Invention

replace paragraph [0002] with the following amended paragraph:

[0002] The current invention relates to an improved apparatus for aftertreating
exhaust gases of an internal combustion engine through the use of a reducing agent
to be introduced into the exhaust gas, in particular urea or a urea/water solution.

insert the following new paragraph:

[0002.5] Description of the Prior Art

Page 2, after paragraph [0006], insert the new paragraphs:

[0006.4] DE 197 50 138 describes a urea metering system with a compressed air supply for atomization, in which a check valve is provided in the compressed air path provided for this.

[0006.6] DE 42 30 056 A1, for example, has disclosed the production of an aerosol, which is based on a reducing agent and the compressed air acting on it, in a mixing chamber. In this connection, the reducing agent and the air are supplied to the mixing chamber via separate lines.

Page 3, insert the following new paragraph:

[0007.5] SUMMARY OF THE INVENTION

replace paragraph [0008] for the following amended paragraph:

[0008] The object of the invention is to improve an exhaust gas aftertreatment apparatus of this generic type to such an extent that a contamination of the air supply line or an onboard compressed air system that communicates with it can be reliably prevented through the use of a compact design.

Page 4, delete paragraph [0011]:

replace paragraph [0012] with the following amended paragraph:

[0012] The means for preventing a reflux are embodied in the form of a check valve

Page 5, after paragraph [0016], insert the following new paragraph:

replace paragraph [0018] with the following amended paragraph:

Page 6, after paragraph [0020], insert the following new paragraph:

replace paragraph [0021] with the following amended paragraph:

[0021] In Fig. 1, the reference numeral 1 refers to a urea tank from which a urea/water solution is aspirated by a supply pump 4 via a line 1a with a check valve 2 and a filter 3, which is embodied as a filter sieve, and is fed via another check valve 6 to a metering valve 7 of a mixing chamber 8. The metering valve 7 meters the required quantity of urea/water solution into a mixing chamber, which is labeled 9 in Fig. 2. A possible overflow quantity of the urea/water solution can be returned through a return line 12 to the urea tank 1 via a pressure regulator 5 and another check valve 11. A possibly necessary ventilation of the line 1a can be executed via a ventilation circuit with a ventilating valve 10.

replace paragraph [0022] for the following amended paragraph:

[0022] In addition, the reference numeral 20 refers to a compressed air tank from which compressed air can be introduced into the mixing chamber by means of a pressure controller 21, a 2/2-way valve 22, and a check valve 23. The provision of the check valve 23, which can be embodied for example as a ball valve for a flat seat valve, can prevent a reflux of a reducing agent/air mixture from the mixing chamber into the compressed air line 24. In comparison to conventional systems, this sharply reduces the danger of a contamination of an on-board compressed air system that communicates with the compressed air line 24. Check valves of this kind, which can be embodied, for example, as ball valves or flat seat valves, are very inexpensive to procure and use, and have proven to be rugged and dependable.

Page 7, replace paragraph [0024] with the following amended paragraph:

[0024] With the aid of the described valves, the control unit 40 regulates the pressure in the compressed air line 24 and also monitors the urea/water solution pressure. The control unit 40 detects deviations and errors, stores them, and displays them on a diagnostic apparatus (not shown), for example a PC.

Page 8, replace paragraph [0027] with the following amended paragraph:

[0027] Another preferred embodiment of a check valve that can be used in the apparatus according to the invention or the mixing chamber according to the invention will now be described in conjunction with Fig. 3. In this connection, Fig. 3a gives a sectional view and Fig. 3b gives a perspective, exploded view of the check valve. The essential item of the check valve shown in Fig. 3 is an elastomer valve

body 34, which rests with a sealing lip 35 in an airtight fashion against the inner wall 36 of a valve housing 46. It is likewise possible for the sealing lip 35 to rest directly against the inner wall of the compressed air line, as has been described in conjunction with Fig. 1. When air flows in from the air line 24, the valve opens; when there is a reflux of air, the valve closes.

Page 9, insert the following new paragraph:

[0029] The foregoing relates to preferred exemplary embodiment of the invention, it being understood that other variants and embodiments thereof are possible within the spirit and scope of the invention, the latter being defined by the appended claims.

Page 10, delete "New Claims" and insert --We Claim--.

IN THE CLAIMS

Please cancel claims 1-6 and add new claims 7-12.

7. An apparatus for aftertreating exhaust gases of an internal combustion engine through the use of a reducing agent to be introduced into the exhaust gas, in particular a urea or a urea/water solution, the apparatus comprising

a mixing chamber (8) into which a reducing agent, which is stored in a reducing agent tank (1), can be introduced via a reducing agent line (1a) and into which compressed air, which is contained in a compressed air tank (20), can be introduced via a compressed air line (24), in order to produce a reducing agent/air mixture, and

a check valve for preventing a reflux of the reducing agent or reducing agent/air mixture from the mixing chamber (8) into the compressed air line (24),

the check valve (14, 15; 70) being disposed in the mixing chamber (8) and having an elastic body (34, 14) whereby when pressure is exerted on the elastic body in the compressed air supply direction, the elastic body permits compressed air to pass from the compressed air line into a mixing tank of the mixing chamber and when pressure is exerted in the opposite direction, the elastic body prevents the reflux.

8. The apparatus according to claim 7, wherein the elastic body is an elastic tube (14).

9. The apparatus according to claim 7, wherein the elastic body is an elastomer valve body (34) and that the elastomer valve body has a sealing lip (35), which rests

in an airtight fashion against an inner wall of a valve housing (46) or the compressed air line (24).

10. A mixing chamber for producing a reducing agent/air mixture, in particular an aerosol, for aftertreating exhaust gases of an internal combustion engine, the mixing chamber comprising

a mixing tank (9) into which a reducing agent can be introduced via a reducing agent line (1a) and compressed air can be introduced via a compressed air line (24), and

a check valve (14, 15, 70) for preventing a reflux of the reducing agent or reducing agent/air mixture from the mixing chamber into the compressed air line,

the check valve having an elastic body (14, 34) whereby, when pressure is exerted on it in the compressed air supply direction, the elastic body permits compressed air to pass from the compressed air line into a mixing tank of the mixing chamber and when pressure is exerted on it in the opposite direction, the elastic body prevents the reflux.

11. The mixing chamber according to claim 10, wherein the elastic body is an elastic tube (14).

12. The mixing chamber according to claim 10, wherein the elastic body is an elastomer valve body (34) and that the elastomer valve body has a sealing lip (35), which rests in an airtight fashion against an inner wall of a valve housing (46) or the compressed air line (24).

IN THE ABSTRACT


Please substitute the attached Abstract of the Disclosure for the abstract as originally as filed.

REMARKS

The above amendments are being made to place the application in better condition for examination.

Entry of the amendment is respectfully solicited.

Respectfully submitted,

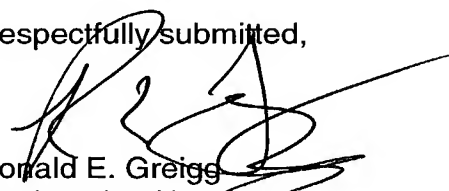

Ronald E. Greigg
Registration No. 31,517
Attorney for Applicants
Customer No. 02119

Greigg & Greigg P.L.L.C.
1423 Powhatan Street, Unit One
Alexandria, VA 22314

Telephone: (703) 838-5500
Facsimile: (703) 838-5554

ABSTRACT OF THE DISCLOSURE

An apparatus for aftertreating exhaust gases of an internal combustion engine through the use of a reducing agent to be introduced into the exhaust gas, in particular a urea or a urea/water solution, having a mixing chamber into which a reducing agent, which is stored in a reducing agent tank, can be introduced via a reducing agent line and into which compressed air, which is contained in a compressed air tank, can be introduced via a compressed air line, in order to produce a reducing agent/air mixture, and having means for preventing a reflux of the reducing agent or reducing agent/air mixture from the mixing chamber into the compressed air line.

procure and use, and have proven to be rugged and dependable] The means for preventing a reflux are embodied in the form of a check valve disposed in the mixing chamber. A check valve of this kind, which is integrated into the mixing chamber, makes it possible to embody the apparatus according to the invention in a particularly compact manner, in particular by using a small elastic body such as an elastic tube or an elastomer valve body.

Page 5, paragraph [0018] has been amended as follows:

[0018] Fig. 1 is a block circuit diagram-style view of a [first preferred embodiment of the apparatus according to the invention] system for aftertreatment of exhaust gases,

Page 6, paragraph [0021] has been amended as follows:

[0021] In Fig. 1, the reference numeral 1 refers to a urea tank from which a urea/water solution is aspirated by a supply pump 4 via a line 1a with a check valve 2 and a filter 3, which is embodied as a filter sieve, and is fed via another check valve 6 to a metering valve 7 of a mixing chamber 8. The metering valve 7 meters the required quantity of urea/water solution into a mixing [tank] chamber, which is labeled 9 in Fig. 2. A possible overflow quantity of the urea/water solution can be returned through a return line 12 to the urea tank 1 via a pressure regulator 5 and another check valve 11. A possibly necessary ventilation of the line 1a can be executed via a ventilation circuit with a ventilating valve 10.

paragraph [0022] has been amended as follows:

[0022] In addition, the reference numeral 20 refers to a compressed air tank from

which compressed air can be introduced into the mixing chamber by means of a pressure controller 21, a 2/2-way valve 22, and a check valve 23. The provision of the check valve 23, which can be embodied for example as a ball valve for a flat seat valve, can prevent a reflux of a reducing agent/air mixture from the mixing chamber into the compressed air line 24. In comparison to conventional systems, this sharply reduces the danger of a contamination of an on-board compressed air system that communicates with the compressed air line 24. Check valves of this kind, which can be embodied, for example, as ball valves or flat seat valves, are very inexpensive to procure and use, and have proven to be rugged and dependable.

Page 7, paragraph [0024] has been amended as follows:

[0024] With the aid of the described [solenoid] valves, the control unit 40 regulates the pressure in the compressed air line 24 and also monitors the urea/water solution pressure. The control unit 40 detects deviations and errors, stores them, and displays them on a diagnostic apparatus (not shown), for example a PC.

Page 8, paragraph [0027] has been amended as follows:

[0027] Another preferred embodiment of a check valve that can be used in the apparatus according to the invention or the mixing chamber according to the invention will now be described in conjunction with Fig. 3. In this connection, Fig. 3a[)] gives a sectional view and Fig. 3[)] gives a perspective, exploded view of the check valve. The essential item of the check valve shown in Fig. 3 is an elastomer valve body 34, which rests with a sealing lip 35 in an airtight fashion against the inner wall 36 of a valve housing 46. It is likewise possible for the sealing lip [15] 35

3/p815

10088998 10/088998
JC13 Rec'd PCT/PTO 26 MAR 2002

Apparatus for Aftertreating Exhaust Gases of an Internal
Combustion Engine

[0001] Prior Art

[0002] The current invention relates to an apparatus for aftertreating exhaust gases of an internal combustion engine through the use of a reducing agent to be introduced into the exhaust gas, in particular urea or a urea/water solution, as generically defined by the preamble to claim 1.

[0003] As a result of the need to comply with ever more stringent emission standards in recent years, numerous apparatuses and processes have been developed for aftertreatment of exhaust gases in internal combustion engines. Efficient exhaust gas aftertreatment systems have been achieved, for example by means of catalytic converter systems, which use urea and/or ammonia as a reducing agent for NO_x conversion.

[0004] In order to achieve a reduction of NO_x components in exhaust gas, reduction catalytic converters have been developed, particularly for diesel engines, which are usually divided into so-called SCR converters (selective catalytic reduction) with a urea metering system and reservoir catalytic converters. The so-called SCR converters are generated by means of a supply of urea and/or ammonia reducing agent, while the so-called reservoir catalytic converters are regenerated with hydrocarbons of the conveyed internal combustion engine fuel in so-called rich phases of the exhaust gas.

[0011] Advantageous embodiments of the apparatus according to the invention and the mixing chamber according to the invention are the subject of the dependent claims.

[0012] According to a preferred embodiment of the apparatus according to the invention, the means for preventing a reflux are embodied as a check valve disposed in the compressed air line.

Check valves of this kind, which can be embodied, for example, as ball valves or flat seat valves, are very inexpensive to procure and use, and have proven to be rugged and dependable.

[0013] According to a particularly preferred embodiment of the apparatus according to the invention, the means for preventing a reflux are embodied as a check valve disposed in the mixing chamber. A check valve of this kind, which is integrated into the mixing chamber, makes it possible to embody the apparatus according to the invention in a particularly compact manner.

[0014] The check valve disposed in the mixing chamber suitably has an elastic tube slid onto the valve body, where the tube is pervious or impervious, depending on the direction in which the pressure is exerted on the valve. A check valve of this kind, whose tube can be comprised of a silicone material, for example, is very small and can be easily replaced.

[0016] According to a preferred embodiment of the mixing chamber according to the invention, the check valve has an elastic tube, which is slid onto a valve body; when pressure is exerted on it in the compressed air supply direction by means of the compressed air, the tube permits compressed air to pass from the compressed air line into the mixing chamber and when pressure is exerted on it in the opposite direction by means of the reducing agent/air mixture in the mixing chamber, the tube prevents this mixture from traveling into the compressed air line.

[0017] Preferred embodiments of the apparatus according to the invention and of the mixing chamber according to the invention will now be explained in detail in conjunction with the accompanying drawings.

[0018] Fig. 1 is a block circuit diagram-style view of a first preferred embodiment of the apparatus according to the invention,

[0019] Fig. 2 is a sectional side view of a preferred embodiment of the mixing chamber according to the invention, and

[0023] By acting on the urea/water solution with the compressed air, an aerosol is produced in the mixing chamber 8, which is introduced into a catalytic converter 30 via an aerosol line 25. In this connection, a control unit 40 detects signals that are received from an overarching motor control unit by means of a CAN data line 41 as well as the signals from pressure, temperature, and fill level sensors 50 to 55, whose operation is known and will not be discussed further here. Based on this information, the control unit 40 calculates a urea/water metering quantity, which is to be added to an exhaust gas flowing through the catalytic converter 30.

[0024] With the aid of the described solenoid valves, the control unit 40 regulates the pressure in the compressed air line 24 and also monitors the urea/water solution pressure. The control unit 40 detects deviations and errors, stores them, and displays them on a diagnostic apparatus (not shown), for example a PC.

[0025] A preferred embodiment of the mixing chamber according to the invention of the kind that can be used in the context of the apparatus according to the invention will now be described in conjunction with Fig. 2. In this mixing chamber 8, it is essential that the check valve is comprised of a silicone tube 14 or of a tube made of a similar elastic material, which is slid onto a valve body 15 and rests in a sealed fashion against the inner wall 16 of the mixing chamber 8. If compressed air flows from the compressed air line 24 into the nozzle bore 17 (a number

Figure 1 consists of 12 histograms arranged in two rows of six. The top row is labeled 'a)' and the bottom row is labeled 'b)'. Each histogram shows the frequency of the number of non-zero elements in the vector of the first 1000 iterations of the algorithm. The x-axis for all histograms is 'Number of non-zero elements' ranging from 0 to 1000. The y-axis is 'Frequency' ranging from 0 to 100. The distributions are roughly bell-shaped and centered around 500.

- 10

mixing chamber (8) and when pressure is exerted on it in the opposite direction, the tube (14) prevents the reducing agent or reducing agent/air mixture from traveling from the pressure chamber into the compressed air line.

5. The apparatus according to claim 3, characterized in that the check valve (50) has an elastomer valve body (34), which rests with a sealing lip (35) in an airtight fashion against an inner wall of a valve housing (46) or the compressed air line (24).


6. A mixing chamber for producing a reducing agent/air mixture, in particular an aerosol, having a mixing tank (9) into which a reducing agent can be introduced via a reducing agent line (1a) and compressed air can be introduced via a compressed air line (24), characterized by means of a check valve (14, 15) for preventing a reflux of the reducing agent or reducing agent/air mixture from the mixing tank of the mixing chamber into the compressed air line.

7. The mixing chamber according to claim 6, characterized in that the check valve (14, 15) has an elastic tube (14), which is slid onto a valve body (15); when pressure is exerted on it in the compressed air supply direction, the tube (14) permits compressed air to pass from the compressed air line into the mixing tank and when pressure is exerted on it in the opposite direction, the tube (14) prevents the reducing agent or reducing agent/air mixture from traveling into the compressed air line (24).

[illegible]


An apparatus for aftertreating exhaust gases of an internal combustion engine through the use of a reducing agent to be introduced into the exhaust gas, in particular a urea or a urea/water solution, having a mixing chamber into which a reducing agent, which is stored in a reducing agent tank, can be introduced via a reducing agent line and into which compressed air, which is contained in a compressed air tank, can be introduced via a compressed air line, in order to produce a reducing agent/air mixture, and having means for preventing a reflux of the reducing agent or reducing agent/air mixture from the mixing chamber into the compressed air line.

FIG. 1

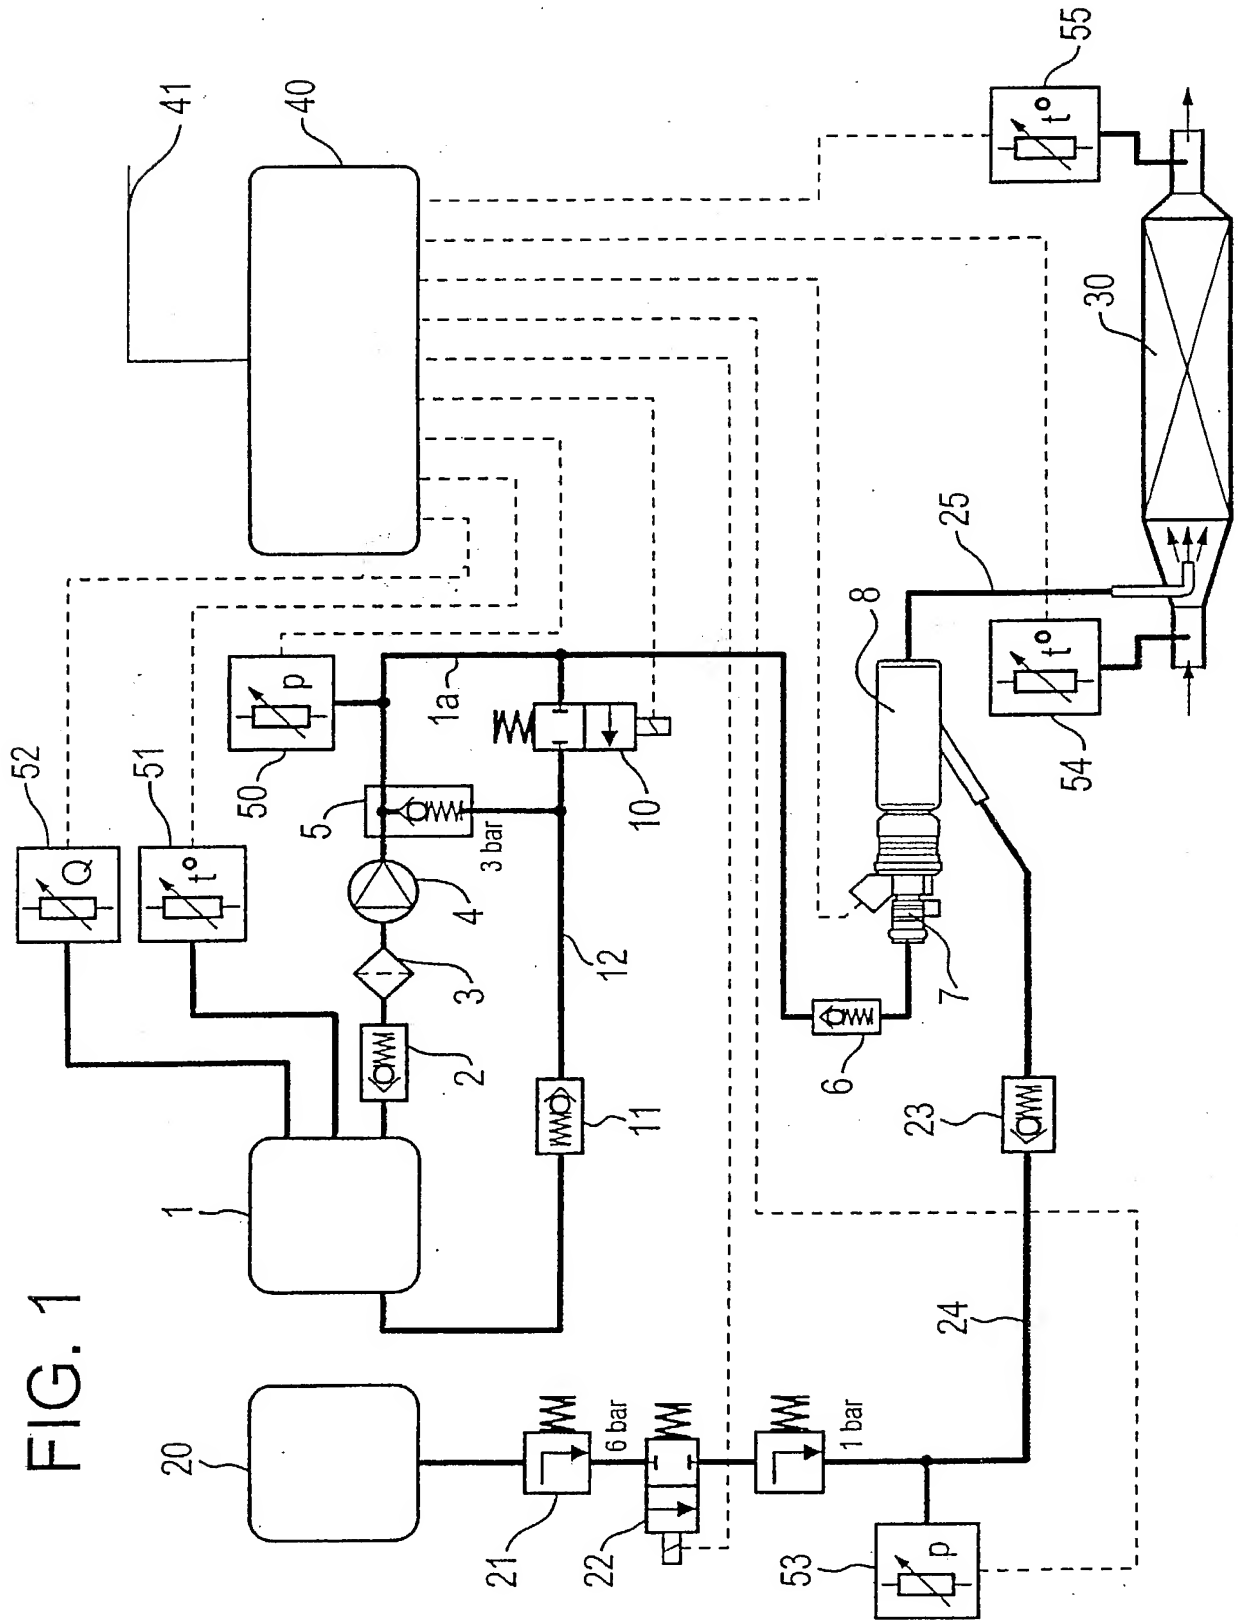

2 / 3

FIG. 2

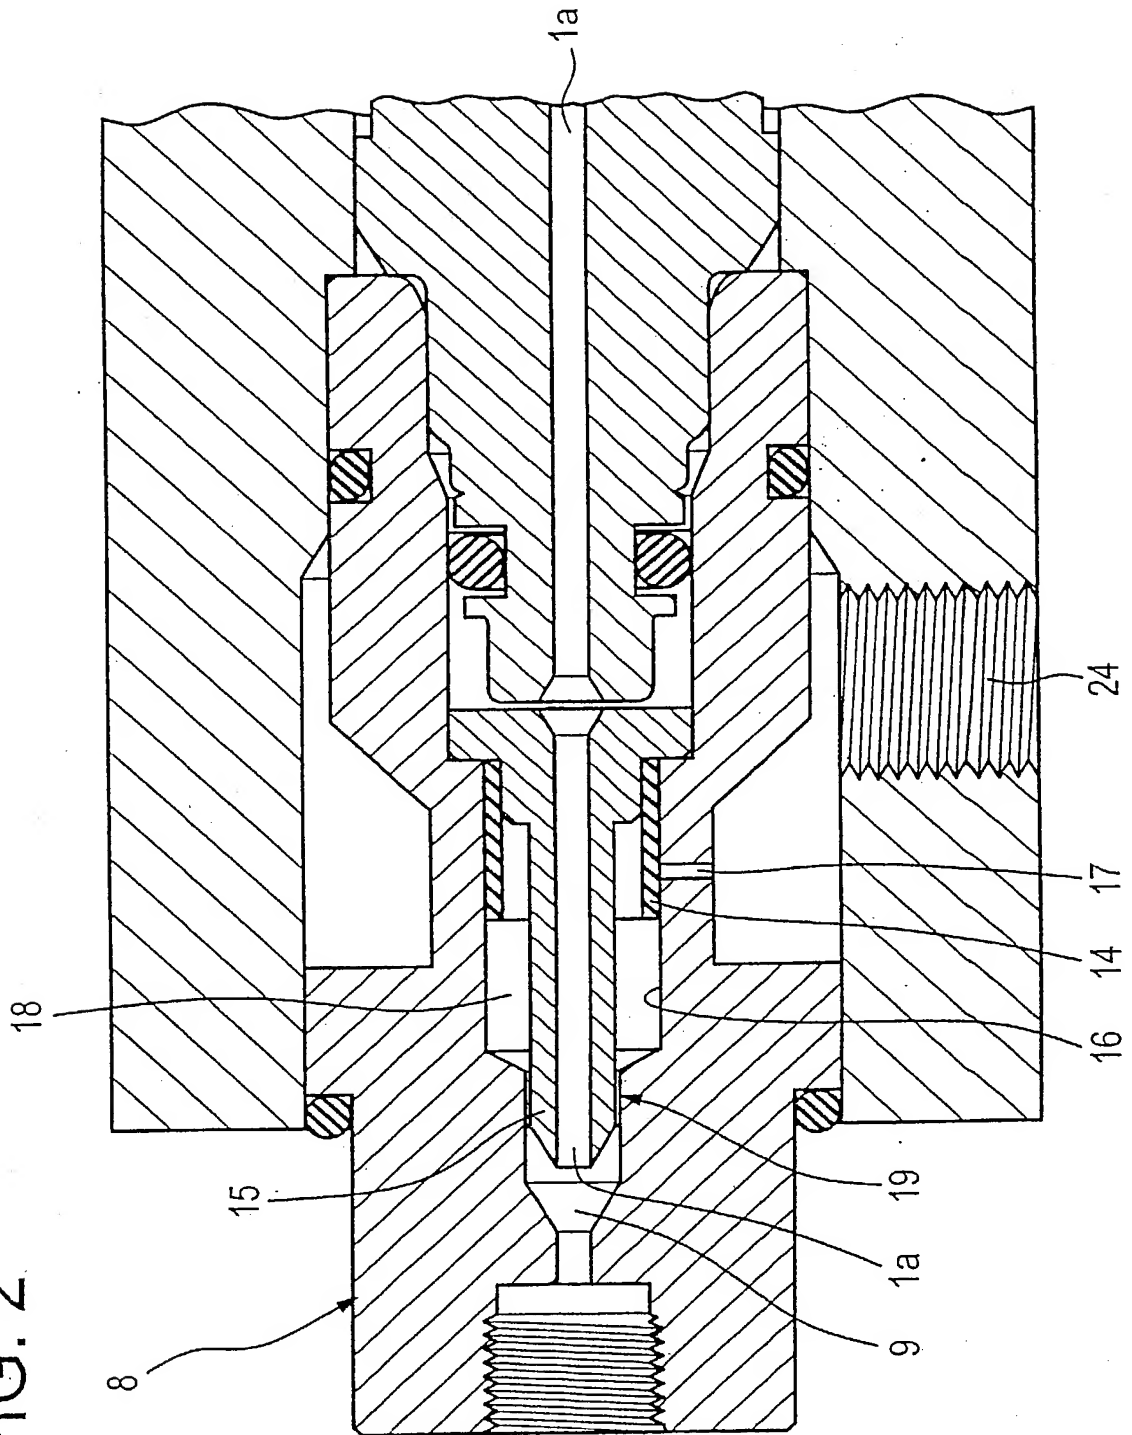

3 / 3

FIG. 3a

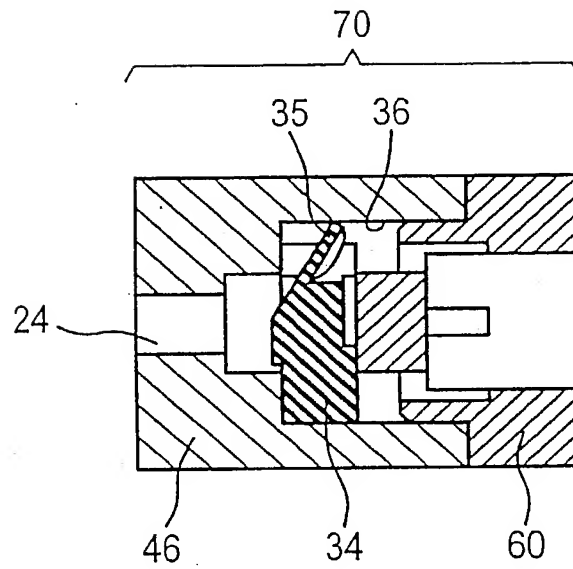


FIG. 3

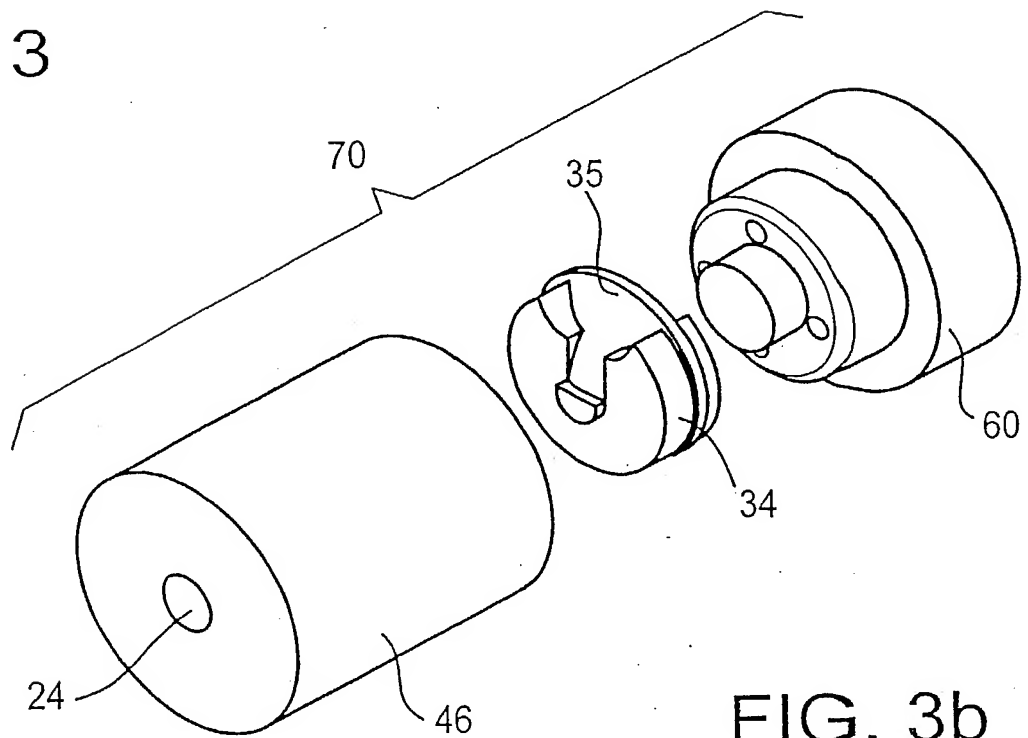


FIG. 3b

(Filing Date)

(Status)
(patented, pending, abandoned)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Ronald E. Greigg, No. 31,517

(11)

Send Correspondence to: Ronald E. Greigg
Greigg & Greigg, P.L.L.C.
1423 Powhatan Street, Unit One
Alexandria, VA 22314

Direct Telephone Calls to: (name and telephone number)
Ronald E. Greigg- (703) 838-5500/ Telephone - (703) 838-5554/Facsimile

1-00

Full name of sole or first inventor Walter FRISCH	
Sole or first inventor's signature <i>Walter Frisch</i>	Date <i>11.7.70</i>
Residence 70435 Stuttgart, Germany <i>71254 DEX</i>	
Citizenship Deutsch <i>ÖSTERREICH</i>	
Post Office Address Hofackerstr. 12 <i>UNTERE GASSE 212</i>	
70435 Stuttgart, Germany <i>71254</i>	

Full name of second inventor, if any Sven HUBER	
Second inventor's signature	Date
Residence 83395 Freilassing, Germany	
Citizenship Deutsch	
Post Office Address Brauhausstrasse	
83395 Freilassing, Germany	

Ronald E. Greigg, No. 31,517

Direct Telephone Calls to: *(name and telephone number)*
Ronald E. Greigg- (703) 838-5500/ Telephone - (703) 838-5554/Facsimile

Full name of sole or first inventor Walter FRISCH	
Sole or first inventor's signature	Date
Residence 70435 Stuttgart, Germany	
Citizenship Deutsch	
Post Office Address Hofaeckerstr. 12	
70435 Stuttgart, Germany	

Full name of second inventor, if any Sven HUBER	
Second inventor's signature <i>[Signature]</i>	Date 13.10.02
Residence 83395 Freilassing, Germany	83404 Aining DEU
Citizenship Deutsch	
Post Office Address Brauthausstrasse	Göllshof 42
83395 Freilassing, Germany	83404 Aining

300

Full name of third inventor, if any Juergen KRAH	
Third inventor's signature <i>Juergen Krah</i>	Date 26.04.02
Residence 5101 Bergheim, Austria <i>ATX</i>	
Citizenship Austrian	
Post Office Address Moosfeldstr. 16	
5101 Bergheim, Austria	

Full name of fourth inventor, if any Hanspeter MAYER	
Fourth inventor's signature	Date
Residence 5421 Adnet, Austria	
Citizenship Austrian	
Post Office Address Adnet 336 B	
5421 Adnet, Austria	

Full name of fifth inventor, if any Michael OFFENHUBER	
Fifth inventor's signature	Date
Residence 5421 Adnet, Austria	
Citizenship Austrian	
Post Office Address Adnet 336 A	
5421 Adnet, Austria	

Full name of sixth inventor, if any Robert SACHSENHOFER	
Sixth inventor's signature	Date
Residence 5411 Oberalm, Austria	
Citizenship Austrian	
Post Office Address Kahlspergstr. 662/9	
5411 Oberalm, Austria	

Full name of third inventor, if any Juergen KRAH	
Third inventor's signature	Date
Residence 5101 Bergheim, Austria	
Citizenship Austrian	
Post Office Address Moosfeldstr. 16	
5101 Bergheim, Austria	

Full name of fourth inventor, if any Hanspeter MAYER	
Fourth inventor's signature	Date
Residence 5421 Adnet, Austria	
Citizenship Austrian	
Post Office Address Adnet 336 B	
5421 Adnet, Austria	

500

Full name of fifth inventor, if any Michael OFFENHUBER	
Fifth inventor's signature <i>Michael Offenhuber</i>	Date 2.5.02
Residence 5421 Adnet, Austria	
Citizenship Austrian	
Post Office Address Adnet 336 A	
5421 Adnet, Austria	

Full name of sixth inventor, if any Robert SACHSENHOFER	
Sixth inventor's signature	Date
Residence 5411 Oberalm, Austria	
Citizenship Austrian	
Post Office Address Kahlspergstr. 662/9	
5411 Oberalm, Austria	

Full name of seventh inventor, if any Roland WEISS	
Seventh inventor's signature	Date
Residence 5424 Vigaun, Austria	
Citizenship Austrian	
Post Office Address Langgasse 134	
5424 Vigaun, Austria	

7-00

Full name of eighth inventor, if any Markus FOETSCHL	
Eighth inventor's signature <i>Markus Foetschl</i>	Date 27. 04. 2001
Residence 5580 Unternberg, Austria	
Citizenship Austrian	
Post Office Address Moosham 67	
5580 Unternberg, Austria	

ATL

Full name of ninth inventor, if any Roland SCHWARZ	
Ninth inventor's signature	Date
Residence 5020 Salzburg, Austria	
Citizenship Austrian	
Post Office Address Dr. Altmannstr. 24	
5020 Salzburg, Austria	

Full name of tenth inventor, if any Gerald HOEPFLINGER	
Tenth inventor's signature	Date
Residence 5412 Puch, Austria	
Citizenship Austrian	
Post Office Address Drei-Linden-Siedlung 628	
5412 Puch, Austria	

Date

A handwritten lowercase letter 'f' is shown on lined paper. The letter is formed with a single stroke, starting from the middle line, going up to touch the top line, and then curving down to cross the bottom line.

A diagram showing a polymer chain segment. It consists of a horizontal line with a loop at the left end. A vertical line extends upwards from the horizontal line, and a horizontal line extends to the right from the vertical line. A small circle is attached to the end of this horizontal line. The label 'Fu' is written below the horizontal line.

Date _____